

Zhejiang Xinghai Energy Technology Co., Ltd.

## **Technical specifications for li-ion battery**

Name of products: High power Cylindrical Li-FePO4 battery

Model : HW 38120HP

Specification : 8000mAh/3.2V

Address : Taihu Road, Eco. & Tec. development zone, Changxing county ,  
Zhejiang China

Design	Check	Audit
Jin Jianhua	Xu Aokui	Xu Aokui

2011-3-20 published

2011-3-28 implementation

---

## 1、 Range of application

This Specifications is apply to the Li-ion battery which is manufactured by Zhejiang Xinghai energy technology Co., Ltd.

## 2、 kinds of models

2.1 kind: High power Cylindrical Li-FePO4 battery


2.2 model: HW 38120HP

## 3、 technology parameter

No.	Item		specification
3-1	normal capacity		8000mAh (0.5c)
3-2	normal voltage		3.2V
3-3	Inter impedance		$\leq 5m\ \Omega$
3-4	Maximum Charge Current		10C (80A)
3-5	Maximum Charge Voltage		$3.65 \pm 0.05V$
3-6	Maximum continuous Discharge Current		10C (80A)
3-7	Maximum Discharge Current		20C (160A)
3-8	discharge stop voltage		2.0V
3-9	dimension	diameter	$38 \pm 1mm$
		height	$122 \pm 1mm$ ( $132 \pm 1mm$ )
3-10	weight		Appro. 300g
3-11	Work temperature	charge	0~45°C
		discharge	-20~60°C
3-12	Store temperature	In one month	-20~45°C
		In sit month	-20~35°C

\*The battery need to be in the condition of half full charge or the voltage about 3.2-3.3

## Dimension of battery

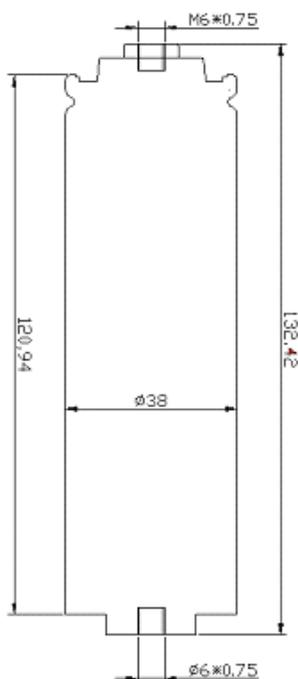

## 4. Standard test conditions

Measurements are carried out at  $20\pm 5^{\circ}\text{C}$  and relative humidity of  $65\pm 20\%$ . Accuracy of voltmeters

## 4、 Test conditions

4.1 experiment and test should at the normal temperature ( $20\pm 5^{\circ}\text{C}$ ) or the normal humidity ( $65\pm 20\%$ ) .

Normal charge: adopt to constant current then constant voltage: constant current is  $0.5C(4000\text{mA})$ , constant voltage is  $3.65\text{V}$ , charge is stopped when the current low to  $160\text{mA}$  during constant voltage process.

Normal discharge: discharge with constant current  $4000\text{mA}$  and discharge to  $2.0\text{V}$ .

## 4.2 the equipments of Test

Voltmeter Impedance  $>1000\ \Omega$  /one

Ammeter total resistance (ammeter and line)  $<0.01\ \Omega$

Vernier caliper precision  $0.02\text{mm}$

## 5. Li-ion Battery Characteristics

Test item	Test conditions	Requirements
(1) Outside Appearance	Visual check	No abnormal stain, Deformation nor damage
(2) starting voltage	Starting voltage in an hour After the normal charge	$\geq 3.3\text{V}$
(3) Standard charge	Battery shall be charged continuously at the constant current of $0.2C_5\text{mA}$ to $3.65\text{V}$ , then charge at the constant voltage of $3.65\text{V}$ until the end current of $0.01C_5\text{mA}$	
(4) Standard discharge	Battery shall be discharged continuously at the constant current of $0.2C_5\text{mA}$ to $2.0\text{V}$	
(5) Rated Capacity	Battery shall be charged in Item (3) and discharged in Item (4) within 10 minutes after full charged. If the discharge capacity does not reach the specified value , the test may be repeated up to three times in total.	Capacity $\geq 8000\text{mAh}$
(6) Cycle Life ( $20^{\circ}\text{C}$ )	Battery shall be charged continuously at the constant current of $0.5C_5\text{mA}$ to $3.65\text{V}$ then charge at the constant voltage of $3.65\text{V}$ until the current of $200\text{mA}$ and discharged continuously at the constant current of $0.5C_5\text{mA}$ to $2.0\text{V}$ . A cycles defined as one charge and discharge, carry out cycles until discharge capacity $<70\% C_5\text{mAh}$ .	$\geq 2000$ cycles
(7) High temperature discharge	Battery shall be charged in Item (3) and discharged at the constant current of $1.0C_5\text{mA}$ to $2.0\text{V}$ within 10 minutes after full charged. If the discharge	Capacity $\geq 7200\text{mAh}$

	capacity does not reach the specified value, the test may be repeated up to three times in total.	
(8)Low temperature discharge	Battery shall be stored under $-10^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 4h after charged in Item (3), then discharged at constant current of $0.5C_{5mA}$ to 2.0V	Capacity $\geq 5400\text{mAh}$
(9)Drop Test	Drop 100% charged test sample from 1 meter above onto concrete board with more than 5cm thickness two times each for every direction after rated charge. After test , cells are discharge at constant current of $0.2 C_{5mA}$	No rupture, fire, smoking, Nor critical damage $\geq 90\%$ $C_{5mA}$
(10)Vibration Test	Vibrate test sample for 90minutes per each of the three mutually perpendicular axis(x, y, z) after rated charge. Amplitude: $0.38\text{mm}(10-30\text{Hz})$ ; $0.19\text{mm} (30-55\text{Hz})$ Frequency: $10-55\text{Hz}(1\text{oct}/\text{min})$ Direction: X, Y, Z.	No rupture, fire, smoke, Nor critical damage $\geq 90\% C_{5mA}$
(11)Hot Oven Test	The charged batteries are to be heated in a gravity convection or circulating air oven. The temperature of the oven is to be raised at a rate of $5 \pm 2^{\circ}\text{C}$ per minute. The oven is to remain for 30 minutes at $130 \pm 2^{\circ}\text{C}$ before the test is discontinued.	No fire, Nor explosion
(12)Over charge	Battery should be tested at $20 \pm 5^{\circ}\text{C}$ , Battery shall be discharged at $1C_{5mA}$ current until end voltage. then connect cathode on DC power, adjust the output current to $15I_{5A}$ , output voltage shouldn't lower than 10V .charging is continued for 7 hours or voltage will not improve and the current will reached 0.	No fire, Nor explosion
(13)Over discharge	Battery is tested at $20 \pm 5^{\circ}\text{C}$ , Battery discharged continuously with $I_{5A}$ to end voltage. then Reverse charge 90 min. with $5I_{5A}$ .	No fire, Nor explosion
(14)Short Circuit Test	Battery shall be charged in item(3), Connect battery terminals with electric wire( electric resistance: $50\text{m}\Omega$ or less ), short circuit , when the temperature will be lower than 10, the test will be end.	No fire, Nor explosion
(16)Storage characteristics	Battery shall be charged in Item (3) , and stored in a temperature-controlled environment at $20 \pm 5^{\circ}\text{C}$ for 30 days. After storage, Battery shall be discharged in Item (4) to obtain the remaining capacity.	Remaining capacity $\geq 90\%C_{5mA}$

## 6. Remark

6.1 please don't let the battery near to hot, fire etc.

6.2 please use special charger.

6.3 polarity is not reversed.

6.4 The battery has the safe equipment, please don't dissect the battery or change the structure of battery for your safe.

- 6.5 Ban to connect directly anode and cathode of battery with the metal.
- 6.6 Ban to beat or throw the battery.
- 6.7 Battery should keep it in the dry and cool place. ban to put the battery into the water
- 6.8 Charging before using if the battery haven't be used in 6 month.

#### 7. Quality guarantee period

- 7.1 quality guarantee period: 2 years from the date of original shipment.
- 7.2 our company has no responsibility, if using the battery without regulation ways,

### **5、 transport**

battery should avoid to Vibration , impact , exposed to the sun and rain. And battery is half-full capacity on passage.

---